

Stagg High School Concession/Restroom Facilities



Owner: Stockton Unified School District
Architect: Verde Design and William C. Kempf
Contractor: Robert A. Bothman, Inc.

ENVIROPLEX
High Performance Modular Buildings




Good for the students, good for the community.

The passage of Measure Q made possible the construction of the first-ever athletic stadium at Stockton Unified School District's Stagg High School. Along with impressive new track and fields, lighting and grandstand seating, the scope included a modern, easy-to-maintain Enviroplex-built concession/restroom facility with features and fixtures that would stand the test of time. A separate Enviroplex-built 10' x 10' ticket booth harmonized the new facilities.

Completed in August 2010, the 960-square-foot concession/restroom building's custom-designed floor plan met all of the athletic program's requirements: multiuser boys' and girls' restrooms on one side of the building and the concession area and storage/maintenance room on the other side, stainless steel roll-up windows to service the efficiently spaced concession sales area and 5-foot front and rear overhangs for added protection from inclement weather. A site-applied three-coat stucco exterior custom-painted with Stagg High's school logo gives the building a striking, polished look.



Total Square Footage – 960 sq ft

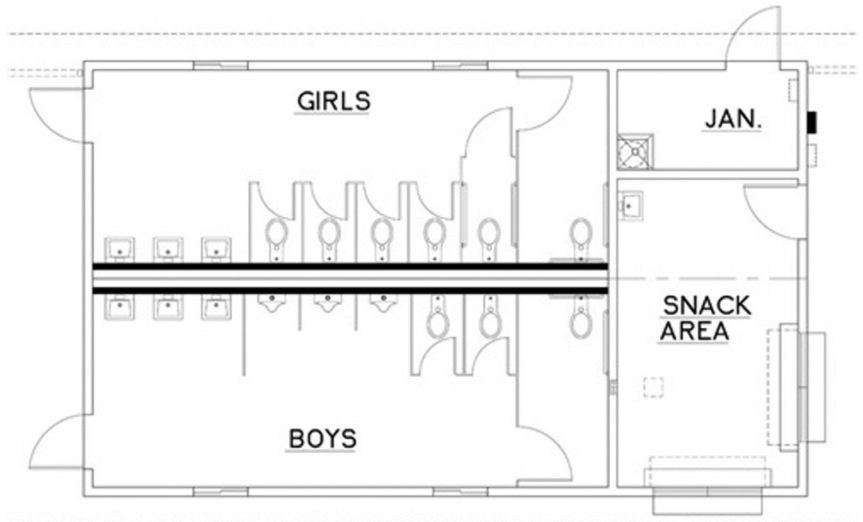

Stagg High School Concession/Restroom Facilities

Key Building Features

- Integrated 1.5:12 pitch roof
- Kynar colored roofing
- Front, rear and side overhangs
- Three-coat stucco exterior (custom-painted by others)
- Concrete stem-wall foundation
- Custom stainless steel roll-up windows
- Custom stainless steel counter tops
- Full-floor and full-height ceramic tile
- Solid plastic toilet partitions